



JAGUAR XK140 & MkVII/VIII/MkIX* OIL FILTER ADAPTOR FITTING INSTRUCTIONS

Please read all the instructions before starting work on your car.

The kit contains:

- Small o-ring
- Large rubber o-ring
- Aluminium adaptor plate
- Extension bolt
- Filter Bolt (948)
- Oil filter



This filter adaptor is intended for the Jaguar XK140 and MkVII/VIII/IX models fitted with a Tecalemit filter head FA2708 – the name Tecalemit will be found cast in to the left hand side of the filter head. As it is common to find the filter head from one Jaguar engine fitted to another please check that you have the correct adaptor for your engine. Check the engine numbers below or contact your supplier if in doubt.


Remove the bowl and the original filter. Remove the old seal for the filter bowl which will be embedded in a groove in the filter head; make sure that the groove is clean and contains no remains of the old seal or gasket sealant. Remove the snap ring, and the splash plate (this looks like a large steel washer) in the centre of the filter head. If there is a felt washer under the plate remove this also.

Fit the smaller of the two rubber o-rings over the alloy spigot in the centre of the filter head; make sure that it sits down in the recess at the base of the spigot. Fit the larger o-ring in the outer groove, again making sure that it is seated correctly.

Screw the long extension bolt securely onto the main locating bolt. The use of Loctite is recommended. Place the alloy adaptor plate in position and insert the bolt up into the filter head and into the original Jaguar hollow locating bolt. Make sure that the adaptor plate is seated squarely and tighten securely, but do not overtighten.

You are now ready to fit a spin-on filter to your Jaguar. We recommend a Crosland 357, Mann W916/1 or similar high quality filter. Fill the filter with oil before fitting and grease the

filter's rubber sealing ring. Always check for oil leaks when starting the engine after replacing the filter. Renew the filter at the recommended intervals.

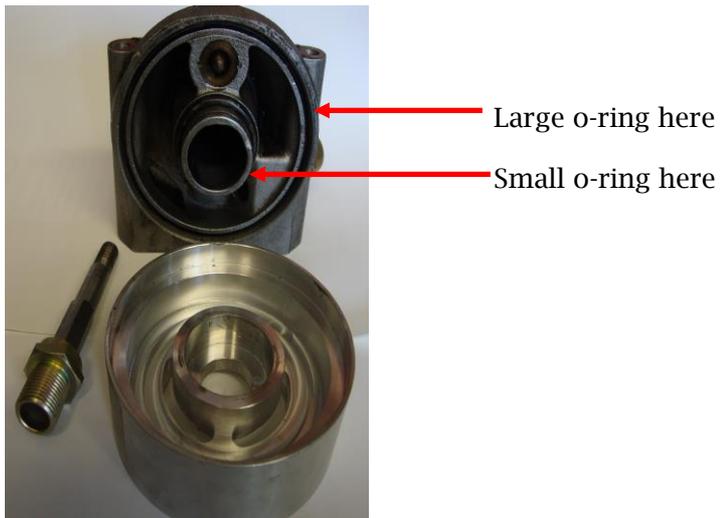

Also available for your Jaguar: braided stainless steel flexible brake and clutch hoses, fuel and oil lines, fuel filters and pumps, oil coolers etc. Ask for details.

XK140 eng. no.: G6233 onwards

MkVII eng. no.: N2942 onwards MkVIII/IX all models